



CS

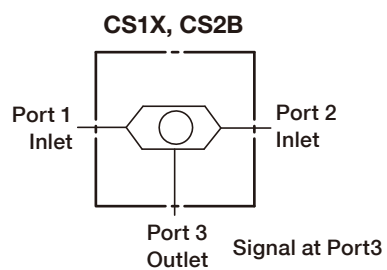

SYMBOLS

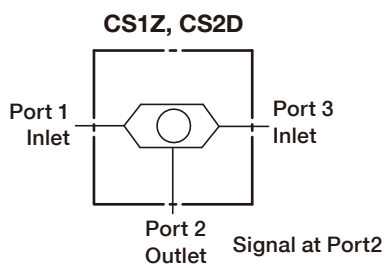

ORDER CODES

CS 2 D - T11A - X X N

1 2 3 4 5 6 7



1	Model Name	CS	
2	Valve Size	1, 2	
3	Operation	CS1Z	T163A, signal at port 2
		CS2D	T11A, signal at port 2
		CS1X	T163A, signal at port 3
		CS2B	T11A, signal at port 3
4	Cavity	T163A, T11A	
5	Control Manner	X	unadjustable
6	Adjustment Range	X	unadjustable
7	Material of Seal	N	buna-N
		V	viton

MODEL SPEC.

Model	Cavity	Capacity (l/min)	Max. Pressure (bar)	Installation Torque (Nm)	Operational Temperature	Weight (kg)
CS1Z	T163A	5	350	30/40	-35 ~ 100°C (-31 ~ 212°F)	0.10
CS2D	T11A	10	350	40/50		0.12
CS1X	T163A	5	350	30/40		0.10
CS2B	T11A	10	350	40/50		0.12

PERFORMANCE CURVES


► Typical Pressure Drop

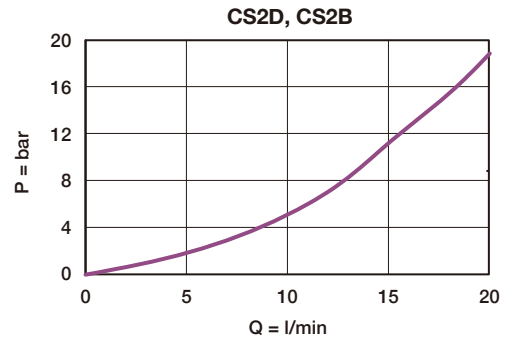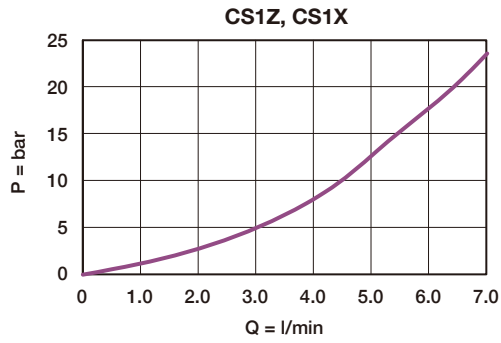

DIMENSION

(UNIT : mm)

► CS1Z, CS2D

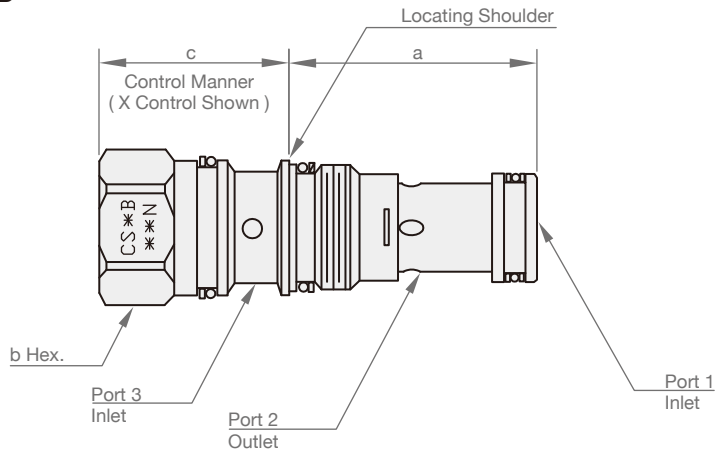

Model	a	b	c
			X
CS1Z	31	19.1	32
CS2D	34.9	22.2	31
CS1X	31	19.1	32
CS2B	34.9	22.2	31

► CS1X, CS2B

