


HS-3



SYMBOLS

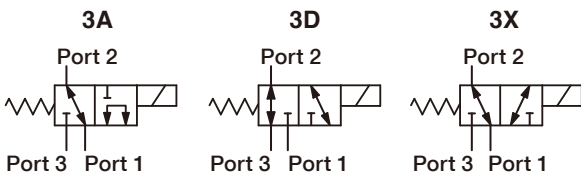

ORDER CODES

HS - **3A** - **16** - **D2**

1 2 3 4

1	▶ Cavity	HS	T082
2	▶ Type of Valve	3A, 3D, 3X (Please refer to the symbol list.)	
3	▶ Tube Diameter	16	
4	▶ Power Source	A1	RAC110V
		A2	RAC220V
		D1	DC12V
		D2	DC24V

MODEL SPEC.

Model	Cavity	Capacity (l/min)	Max. Pressure (bar)	Installation Torque (Nm)	Weight (kg)
HS-3A-16	T082	15	250	39/51	0.43
HS-3D-16	T082	11	250	39/51	0.43
HS-3X-16	T082	13	250	39/51	0.43

► HS-3*

